


myPOS Smart

technical specifications and warranty

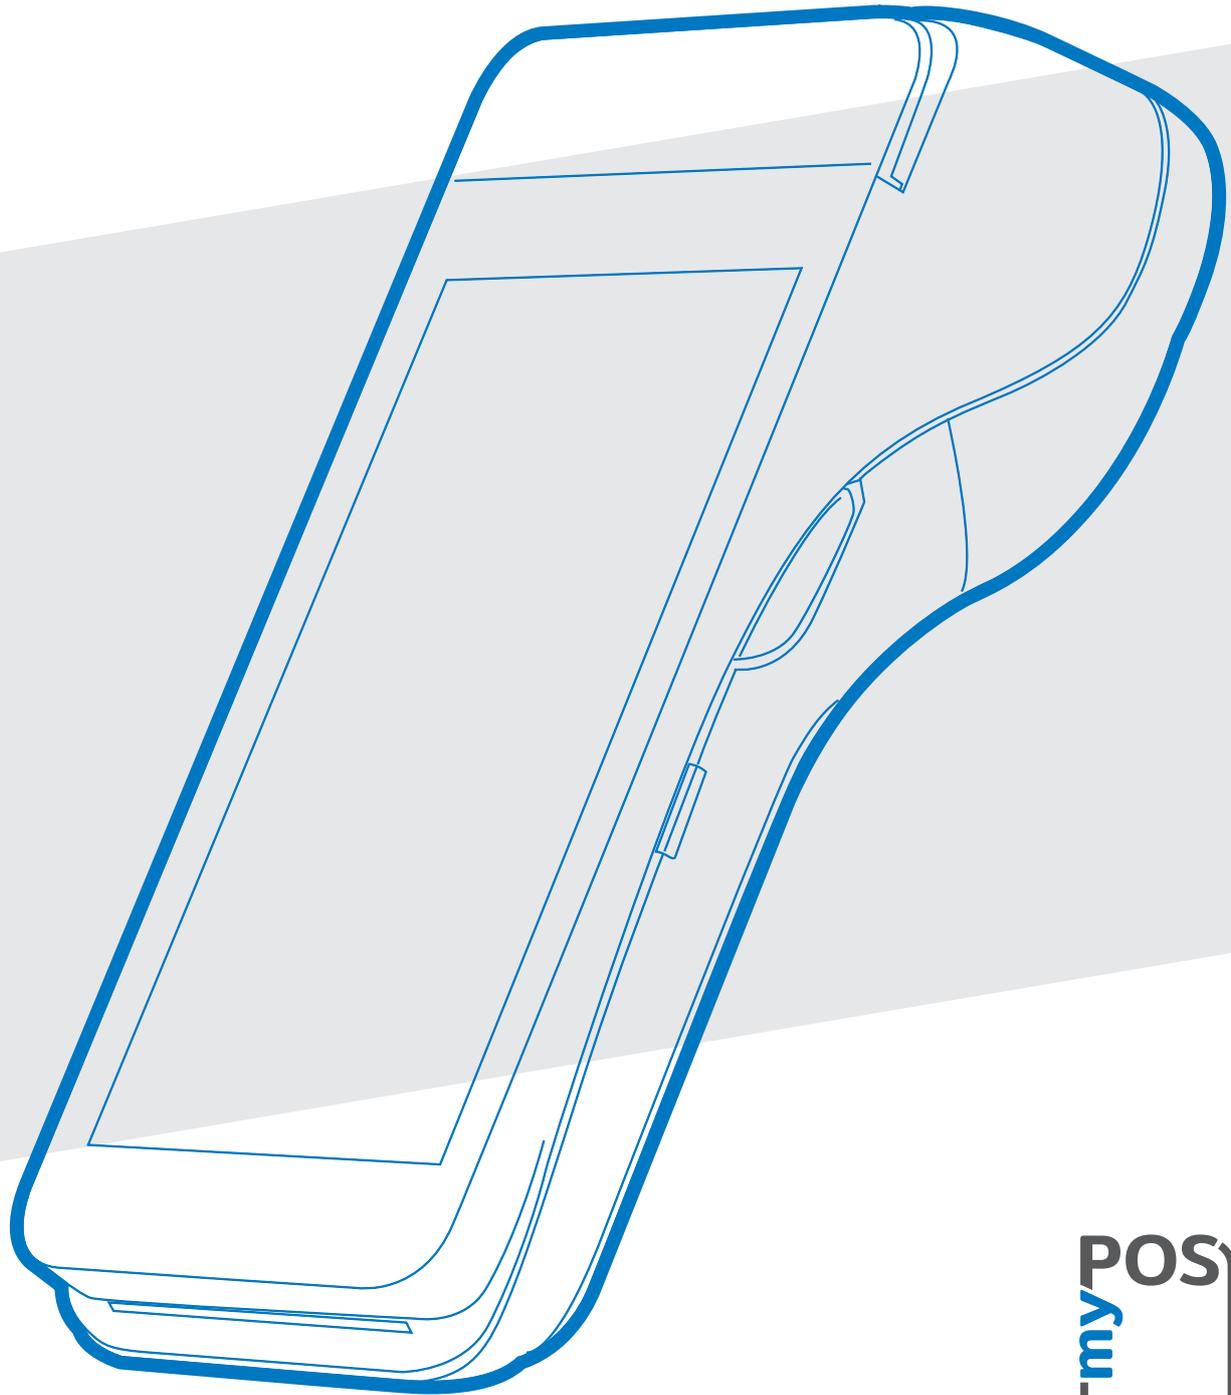

mypos.com

Table of Contents

Supported connections	2
Certifications & EMV	2
myPOS Smart specifications	3
Safety instructions	4
General safety information	4
Safety information for the battery pack	5
Maintenance	5
Let`s get started	6
Overview	6
Charging	6
Warranty and return policy	7
Replacement of myPOS package with defect	7
Important: disposal	7
For more information	7

Supported connections

Your new myPOS Smart device requires internet connection to work properly. The internet connection can be established via Wi-Fi or SIM card. Simply connect your myPOS Smart device to the internet using your mobile phone (via personal hotspot), a wireless router or a SIM card.

Please find the supported connection types below:

- **Wi-Fi** – You can connect your device using a Personal Hotspot or a Wi-Fi router. The supported encryption methods for Wi-Fi networks are WPA and WPA2.
- **SIM Card** - Make sure that the data connection service is activated.

Certifications & EMV



EC Declaration of conformity: The manufacturer PAX Technology Limited, China, declares that this product is compatible with the essential and other requirements of EC Directives R&TTE 1999/5/CE and related EC Directives and carries the CE mark accordingly.

myPOS Smart specifications

Operating system	Android 5.1.1
Processor	Application: ARM Cortex A7 1.2GHz 4 Core Processor Security: ARM 11 266MHz 32Bit
Memory	1GB DDR3 SDRAM, 8GB EMMC
Display	5.0 Inch 720x1280 Pixel Capacitive Touch Screen White LED Backlights
Physical Keys	1 x ON/OFF Key 2 Shortcuts
Printer	High-Speed Thermal Printer Paper Roll Width/Diameter: 58mm/40mm
Communications	4G Bluetooth Wi-Fi
Camera	5 Megapixel Auto Zoom Dual Camera, 1D & 2D Scanner
Card Readers	Magnetic Card Reader (Track 1/2/3, Bi-Directional; ISO 7810, ISO 7811 ISO 7813) Smart Card Reader (Supports 1.8V, 3.3V, 5V Card; Supports Memory Card, CPU Card; EMV Ready, PBOC3.0; ISO 7816 Standard) Supports electronic signature capture Built-In NFC Contactless Card Reader (13.56MHz, 14443 Type A/B, Supports Point-to-Point Communication)
Battery	Long Lasting Li-Ion Battery 5250mAh* 3.7V
Audio	Speaker Functionality Microphone & Sound Wave Payment Supported
Physical	Length: 175.7 mm Height: 78 mm Width: 57 mm Weight: 458g (including battery)
Location	GPS GLONASS
Peripheral Ports	1 x Micro-USB (OTG) 1 x SIM Card Slot 2 x PSAM Card Slot 1 x Micro SD Card Slot (Supports up to 32GB)
Environmental	0°C ~ 50°C (32°F ~ 122°F) Operating Temperature 5% ~ 95% Relative Humidity, Non-Condensing -20°C ~ 70°C (-4°F ~ 158°F) Storage Temperature
Voltage	Input: 100 - 240V AC. 50Hz/60Hz Output: 5.0V DC, 2.0A Micro-USB Standard Charging Port
Accessories	1.0m Micro-USB Charging Cable
Certifications	PCI PTS 4.x EMV L1 & L2 MasterCard Contactless Visa payWave Amex Expresspay Discover D-PAS MasterCard TQM NSICC

G-Sensor	Yes
Security	ANSI X9.8 / ISO9564, ANSIX9.9 / ANSI X9.19 ANSI X9.24 / ANSI X9.52 3DES, RSA2048, SHA-256, SM2, SM3, SM4, etc MK/SK, FIXEDKEY, DUKPT SRED RSA, AES, 3DES
Built-in apps	Payment, Payment Request, MO/TO Payment, Top-up, Register, App Market, Settings
Languages	English, German, Bulgarian, Czech, Greek, Spanish, French, Croatian, Italian, Dutch, Portugal, Romanian, Swedish

**May vary*

Manufacturer: PAX Technology Limited

Address: Room 2416, 24/F; Sun Hung Kai Centre, 30 Harbour Road, Wanchai, Hong Kong

Safety instructions

General safety information

- Use only the provided AC adapter. There is a risk of explosion, fire and device damage if other adapters are used.
- Never expose your device to extreme temperatures. There is a risk of explosion and fire.
- Switch off the device immediately if it starts to emit smoke, unusual odours or noises. If you continue to use the device under these circumstances, there is a risk of fire and electric shock. In such cases, you need to send the device for repair.
- Do not allow foreign matter to fall into the equipment. Penetration of foreign objects may lead to fire or electric shock.
- Only operate your myPOS Smart terminal with the supplied accessories. The use of other accessories will lead to malfunctioning.
- Do not expose the unit to extreme weather conditions such as rain, hail, strong sunlight or snow. In case of damage, the unit must be examined by customer service for possible faults.

- Do not insert any objects that do not meet the specified purpose into the openings on the casing or the card slots. This will cause damage to the casing or the card reader.
- Please put the myPOS Smart device, battery and equipment out of reach of children to prevent swallowing of parts by children, causing injury to children or others, or damage to the objects themselves.
- The terminal does not contain any parts to be serviced by the user and therefore must not be opened. If opened, the warranty is rendered null and void.
- Do not drop, knock or shake the device. Rough handling can break internal circuit boards and fin mechanics.
- The myPOS Smart device is equipped with a Wi-Fi interface for wireless communication. Never use the device in environments where it could cause interference (airplanes, hospitals, etc.)

Safety information for the battery pack


- Only use the included battery model.
- Do not subject the battery to extreme heat.
- Never short-circuit any contacts due to risk of explosion.
- Charging temperature should be 0-40°C.
- Only use the supplied charger.
- Do not store below -20°C or above 70°C.
- Do not apply pressure to the battery.
- Do not disassemble, puncture or damage the battery.

Maintenance

- Do not use harsh chemicals, cleaning solvents, or strong detergents to clean the device.
- Do not use compressed air to clean the unit or its components or to remove dust.
- Make sure that you do not scratch the touch screen surface.
- Make sure that you keep the charging contacts clean.

Let`s get started

Overview

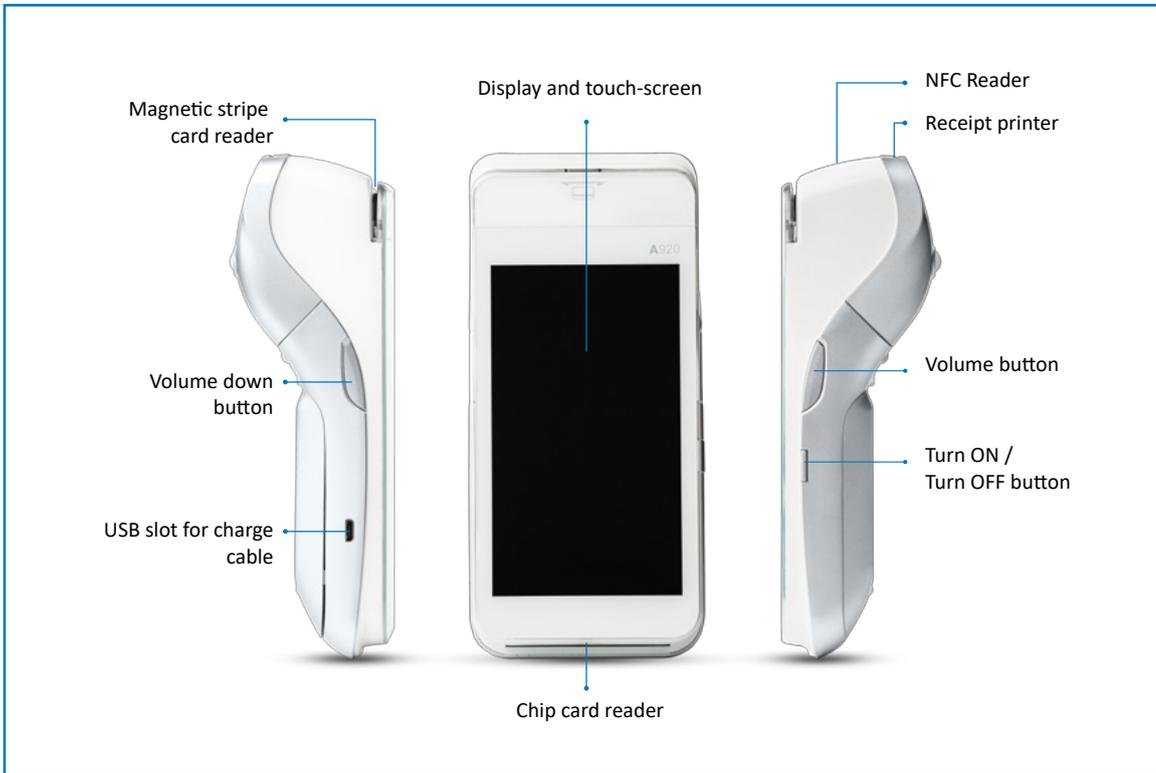

Charging

The terminal displays the Battery Power status in percentages. There are a number of factors that can affect the battery life, for example:

- Length of time off the charger
- Time between transactions

Please check the battery status prior to initiating any operation on the terminal. If it indicates 'very low' (10% or less) or 'no power', you should recharge the battery.

When you turn ON your myPOS Smart device for the first time, you need to charge it. Input the charge cable in the charging slot (point 05).

Caution: Rechargeable battery needs to be replaced if it has been used for two years. If the rechargeable battery is not in its original shape, or if it's overheated, please replace with a new battery.

Do not use any other external cables other than the specified and/or supplied ones. Ensure that the cable is routed to prevent damage or accidental contact. This device is intended for use when supplied with power from a low voltage external power supply, charge it. Input the charge cable in the charging slot (point 05).



Warranty and return policy

Important: The product, including myPOS Smart device and myPOS Business card (“the product”) is not covered by Consumer law, including EC Directives on Consumer Protection and Distance selling Directives. This product is not designated to consumers, meaning any natural person who is acting for purposes, which are outside his trade, business, craft or profession. This product represents financial services and is designated only for accepting of payments for services or goods offered by natural or legal persons with a legal business activity, acting as professionals, sole traders, traders, merchants, self-employed or otherwise selling goods or services.

Replacement of myPOS package with defect

- Client must not open the POS terminal device and must not try to repair the defect by himself/herself. This will be deemed as a defect caused by Client and the service provider will not be liable for its obligations under the Return Policy.
- You have the right to return the full myPOS package within 30 days from the date of receipt.
- Some Distributors may provide post-sale customer support and may be able to take back the defected myPOS Smart device. Please contact your Distributor or Agent first and check for post-sale customer support. In case there is not such, please proceed as instructed in this Return Policy.
- The guarantee of the service provider does not cover any cables, accessories, plugs, or power supply units or other items, different from the myPOS Smart devices and the myPOS Business card in the myPOS Package.

Please read the full text of the Return Policy available at www.myPOS.eu prior to registration for the service and activation of the myPOS Package.

Important: disposal



You are not allowed to dispose any part of the myPOS Smart device, including its battery, cables or other components with the general household waste. If your myPOS Smart is not functioning, you have to send it for repair by following the Return policy available at www.myPOS.eu.

For more information

For full list of available documents visit:
<https://www.mypos.eu/en/devices/smart>